



STUDIO2508A STUDIO3008A STUDIO3508A STUDIO4508A STUDIO5008A



Datasheet

- > Five monochrome A3 systems with a speed of up to 50 ppm for businesses with demanding print, scan, copy, and fax needs.
- State-of-the-art technology combined with intuitive usage via a 22.9 cm tabletlike display, which can be customised according to a user's needs.
- Ideal for medium to large sized workgroups which need reliable document output and expect excellent image quality.

Every industry has unique workflow needs. Toshiba has developed customisable MFPs to make your job easier. Intuitive and smartly integrated, our products simplify complex tasks and give you control while providing the reliability Toshiba is known for.

The Toshiba e-STUDIO5008A series is designed to deliver fast and efficient high-quality documents. Equipped with advanced Toshiba e-BRIDGE controller technology, the series is presented in a new design.

Mobile printing is important and Toshiba's new systems give you full flexibility to do so. All models can easily connect to mobile devices via AirPrint, Google Cloud Print, or the Mopria Print Service.

All e-BRIDGE Next models fulfill the highest security standards to protect your data from unwanted access. So whether you are looking for document security, device security, or access security - our new systems have it all.



SPECIFICATIONS

General

| Print & Copy Speed | 25/30/35/45/50 ppm (A4) 16/16/25/25/25 ppm (A3) |
|---------------------|---|
| Warm-up Time | Approx. 14/14/16/16/16 seconds from low power mode |
| Paper Size & Weight | Cassettes: A5R-A3, 60-256 g/m² Bypass: A5R-A3, 52-256 g/m² |
| Paper Capacity | 2 x 550 sheets (Cassettes), 1 x 100 sheets (Bypass) Maximum 3,200 sheets |
| Inner Output Tray | 550-sheet capacity |
| Automatic Duplex | A5R-A3, 60-256 g/m ² |
| Controller Type | Toshiba e-BRIDGE |
| Control Panel | 22.9 cm (9") Multi-Touch Colour Panel |
| Memory | Toshiba Secure HDD 320 GB2), 4 GB RAM |
| Interface | 10Base-T/100Base-TX/1000Base-T, High Speed USB 2.0, WLAN ¹⁾ (IEEE802.11b/g/n), Bluetooth ¹⁾ , WiFi Direct ¹⁾ |
| Dimensions & Weight | 585 x 585 x 787 mm (W x D x H), ~ 58 kg |
| Starter-Kit | Drum |

600 x 600 dpi, 2,400 x 600 dpi (with smoothing),

Windows 10/8/7/Vista/Server 2008 (32/64 bit), Windows

Server 2012/Server 2008 R2 (64 bit), Mac OS X 10.6.8-10.11, Linux/Unix, Citrix, Novell NetWare (NDPS), SAP,

TCP/IP (IPv4/IPv6), IPX/SPX, EtherTalk, NetBios over

1,200 x 1,200 dpi (2 bit, PostScript driver only), 3,600 x 1,200 dpi (PostScript driver with smoothing only)

PCL5e, PCL5c, PCL6 (PCL XL), XPS and

e-BRIDGE Print & Capture, AirPrint, Mopria Print Service, Google Cloud Print Universal Printer Driver, Driver Templates,

Print from USB, Hold print, Tandem printing

PostScript 3 compatible

AS/400

TCP/IP

Copy

| Scan: 600 x 600 dpi Print: 2,400 x 600 dpi with smoothing | |
|---|--|
| Approx. 4.3/4.3/3.6/3.6/3.6 seconds | |
| 25-400% (Platen), 25-200% (RADF/DSDF) ¹⁾ | |
| Text, Text/Photo, Photo, Colour Document, Custom | |
| Electronic Sort, Rotate Sort, Edge Erase, 2-in-1 / 4-in-1 mode | |
| | |

Fax¹⁾

| Communication | Super G3, G3 - (opt. 2 nd line), Internet Fax T.37 |
|----------------------|---|
| Transmission Speed | Approx. 3 seconds per page |
| Compression | JBIG, MMR, MR, MH |
| Fax Memory | 1 GB (HDD) Transmission/Reception |
| Network-Fax | Driver for Windows 10/8/7/Vista/Server 2008/Server 2003 (32/64 bit), Server 2012/Server 2008 (64 bit) |
| Incoming Fax Routing | To shared folders (SMB, FTP, IPX/SPX), E-Mail, e-Filing |

System & Security

| Device Management | e-BRIDGE Fleet Management System ¹), Top Access for remote administration and configuration |
|-----------------------|--|
| System Features | e-Filing document server for secure storage, Document distribution and Print-on-Demand (1 public box, 200 user boxes), 12,060 one-touch templates for storage of personalised settings or workflows, Scan/Fax Preview, e-BRIDGE Open Platform ¹), Embedded Web Browser, Job Skip |
| Accounting & Security | Role Based Access, LDAP support, 1,000 department & 10,000 user codes, Card Reader ¹), Private Print, Standard data encryption with Toshiba Secure HDD, Data Overwrite Enabler ¹), IP and MAC address filter, Port filter, Support of SSL and IPsec ¹) protocols, IEEE802.1x support, IEEE2600.1 compliant ¹), Scan to Secure PDF |



1) Optional

1 GB = 1 billion bytes; the actual formatted capacity is less. Available capacity will also be less if software applications are pre-installed.
 For e-STUDIO2508A and e-STUDIO3008A only

Scan

Print

Resolution

Page Description Language

Supported Systems

Network Protocols

Mobile Printing

Print Functions

| Resolution | Maximum 600 x 600 dpi |
|----------------|--|
| Scan Speed | Reversing Automatic Document Feeder ¹⁾ : up to 73 ipm (300 dpi) in colour and monochrome |
| | Dual Scan Document Feeder ¹⁾ : up to 240 ipm (300 dpi) in colour and monochrome |
| Scan Modes | Auto-Colour (ACS), Colour, Greyscale, Monochrome |
| File Formats | JPEG, Multi/Single Page TIFF/XPS/PDF, SecurePDF, Slim PDF, PDF/A, Searchable PDF ¹⁾ (and other formats like DOCX, XLSX, RTF, TXT) ¹⁾ |
| Scan Functions | WS Scan, Scan to USB, Scan to E-Mail, Scan to File (SMB, FTP, FTPS, IPX/SPX, Local), Meta Scan ¹⁾ , OCR Scan ¹⁾ , Scan to Box (e-Filing), WIA, TWAIN |

OPTIONS

| REVERSING AUTOMATIC DOCUMENT FEEDER – MR-3031 | 100-sheet capacity, / |
|--|---|
| DUAL SCAN DOCUMENT FEEDER – MR-4000 | 300-sheet capacity, A |
| PAPER FEED PEDESTAL – KD-1058 | 550-sheet capacity (* A5R-A3, 60-256 g/m ² |
| DRAWER MODULE – MY-1048 | For Paper Feed Pede 550-sheet capacity (1 A5R-A3, 60-256 g/m ² |
| ENVELOPE DRAWER – MY-1049 (can also be used for normal paper) | For Paper Feed Pede Envelopes: 50-envelo 100 x 162 mm - 240 Paper: 550-sheet cap A5R-A4R, 60-256 g/r |
| LARGE CAPACITY FEEDER – KD-1059A4 | 2,000-sheet capacity |
| INNER FINISHER – MJ-1042 | 2 trays, 600-sheet ca 50-sheet multi-positio A5R-A3, 64-105 g/m ² |
| MULTI-STAPLE FINISHER – MJ-1109 | 2 trays, 2,250-sheet o 50-sheet multi-positio A5R-A3, 60-105 g/m ² |
| SADDLE-STITCH FINISHER – MJ-1110 | 2 trays, 3,250-sheet of 50-sheet multi-position 5-sheet center folding Saddle-stitched book A5R-A3, 60-105 g/m ² |

HOLE PUNCH UNIT – MJ-6011E/ MJ6011F, MJ-6105E/MJ-6105F


A5R-A3, 35-157 g/m²

A5R-A3, 35-209 g/m² (1 Cassette), 1² estal (1 Cassette) estal or 2nd cassette lope capacity, x 380 mm, 60-85 g/m² apacity (1 Cassette), /m² y, A4, 64-105 g/m² apacity ion stapling n² (stapling mode) capacity ion stapling n² (stapling mode) capacity ion stapling ng oklets of up to 60 pages n² (stapling mode)

Available in 2 holes (E), 4 holes (F), 4 holes (S)

PLATEN COVER - KA-5005PC DESK - MH-5005 HARD DISK DRIVE 320 GB2) (FIPS 140-2 STANDARD) - GE-1230 JOB SEPARATOR - MJ-5015, MJ-5014³⁾ WORK TRAY - KK-5005 ACCESSORY TRAY - GR-1250 PANEL TEN-KEY OPTION - GR-1260 USB HUB³⁾ - GR-1270 FAX BOARD - GD-1370EU WIRELESS LAN / BLUETOOTH MODULE (incl. WiFi Direct) - GN-4020 e-BRIDGE ID-GATE – TWN3/4 DATA OVERWRITE ENABLER - GP-1070 **IPsec ENABLER – GP-1080** HARDCOPY SECURITY PRINTING KIT - GP-1190A EMBEDDED OCR ENABLER - GS-1080, GS-1085 MULTI-STATION PRINT ENABLER - GS-1090, GS-1095 META SCAN ENABLER - GS-1010 **UNICODE FONT ENABLER - GS-1007** ACCESSIBLE ARM - KK-2560

CONFIGURATION

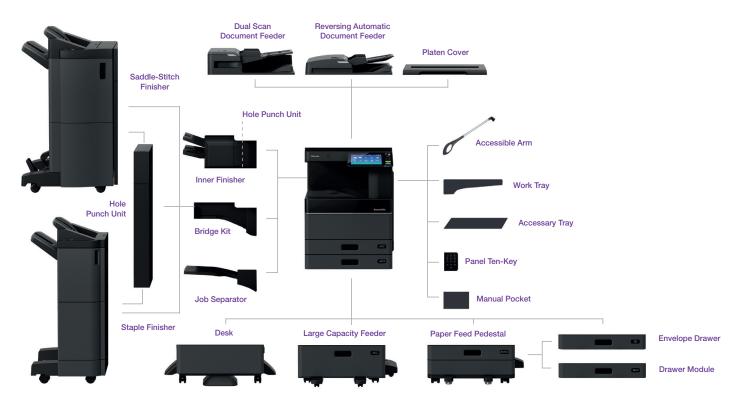

About Toshiba Tec

Toshiba Tec Germany Imaging Systems GmbH is part of the globally operating Toshiba Tec Corporation, active in various high-tech industrial sectors.

Toshiba Tec Corporation is a leading provider of information technology, operating across multiple industries - ranging from retail, education and business services to hospitality and manufacturing. With headquarters in Japan and over 80 subsidiaries worldwide, Toshiba Tec Corporation helps organisations transform the way they create, record, share, manage, and display information.

For more information please contact us:

Toshiba Tec Germany Imaging Systems GmbH

Carl-Schurz-Str. 7 41460 Neuss Germany

Telephone +49 2131-1245-0

Fax +49 2131-1245-402

Website https://www.toshibatec.eu

Together Information is Toshiba's vision for how people and organisations

It is based on our belief that the most successful organisations are those that communicate information in the most efficient way.

We make that possible through an integrated portfolio of industry specific solutions, all of which reflect Toshiba's commitment to the future of the planet.

create, record, share, manage and display ideas and data.



Technical data is subject to change without prior notice. All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries. All rights reserved. We are constantly making efforts to deliver the latest status of data to our partners. Specifications for some models may change in the time between the production and the release of this documentation. Copyright ©2016 Toshiba Tec. Datasheet_e-STUDIO5008A_series_GBIDD_201605



lixed Sources oduct group from well-managed forests d other controlled sources w.fec.org Cert no. TT-CoC-003843 996 Forest Stewardship Council