


Versatility, Intelligence and Reliability at their best

The TASKalfa 3554ci is the ideal partner for an ever changing business environment featuring reliable performance with reduced maintenance requirements and latest security. Your team can stay focused on their own tasks while this MFP delivers the results they are counting on. The 10.1" touchscreen with our newly designed simple and intuitive user interface will make operating this device as easy as possible.

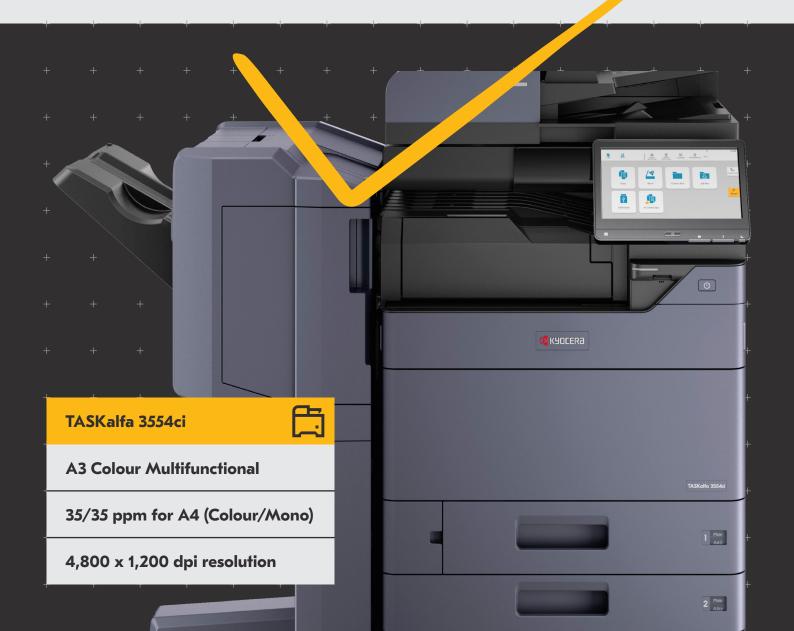

Specifications

GENERAL

KYOCERA TASKalfa Laser Colour Multifunctional, HyPAS™ solution platform

Operation panel: 256.5 mm (10.1 inch) full-colour touch panel display, speaker for job notification, 15° - 90° swivel mounted Engine speed: Up to 35/17 pages A4/A3 per minute, Duplex print/copy speed: 35 pages A4 per minute

Resolution: 4800dpi equivalent x 1200dpi (print), 600 × 600dpi (scan/copy)

Warm-up time: 18 seconds or less
Time to first print: 5.9/7.7 seconds or less in Mono/Colour Time to first copy: 6.3/8.5 seconds or less in Mono/Colour (DP), Approx. 5.3/7.0 seconds or less in Mono/Colour (Platen)

CPU: ARM A53 (Quad Core) 1.6GHz
Memory: Standard 4GB, 32GB SSD, optional 320GB or 1TB

Standard interfaces: USB 3.0 (Super-Speed USB), 4 x USB Host Interface, Gigabit Ethernet (10BaseT/100BaseTX/1000BaseT, IPv6, IPv4, IPSec, 802.3az support), optional Wi-Fi (IEEE 802.11a/b/g/n/ac), 2 eKUIO slots for optional internal print server or for optional fax system, slot for optional Wireless LAN, Slot for optional SD Card, NFC tag

Dimensions (W × D × H): 602 mm × 665 mm × 790 mm

Weight: Approx. 90 kg

Power source: AC 220-240 V, 50/60 Hz

Power consumption: Print Mode: 590W; Copy Mode: 590W;

Ready Mode: 40 W; Sleep Mode: 0.5 W

Noise (surface sound pressure level: ISO 7779 measurement

distance of 1 meter)
Copying/Printing: 49.0 dB(A) LpA in colour

Stand-by mode: 31.3 dB(A) LpA

Safety standards: TÜV/GS, CE. This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard.

PAPER HANDLING

All paper capacities quoted are based on paper thickness of max. 0.11 mm. Please use paper recommended by Kyocera under

normal environmental conditions. Input capacity: Multi-purpose 150 sheets, 52 - 300g/m2, (Banner 136-163 g/m²), A6R - SRA3 (320 x 450 mm), Banner max. 304.8 x 1,220 mm, Standard universal paper cassette: 2 x 500 sheet, 52 -300g/m2, Upper cassette: A6R up to A4R, lower cassette A6R up to SRA3, Max. input capacity with options: 7,150 sheets A4 Duplex: Standard 60 to 256 g/m2, SRA3 to A6R

Output capacity: Standard 500 sheets face down, max. 5,000

PRINT FUNCTIONS

ontroller language: PRESCRIBE

Emulations: PCL6 (PCL5c / PCL-XL), KPDL3 (PostScript 3 compatible), PDF Direct Print, XPS Direct Print and OpenXPS **Operating systems:** All current Windows operating systems MAC OS X Version 10.9 or higher Unix, Linux, as well as other

operating systems on request Fonts/barcodes: 93 outline fonts (PCL), 136 fonts (KPDL 3), 4 fonts (Calibri), 4 fonts (Cambria), 1 Bitmap font, 45 types of one-dimensional barcodes, 1 type of two-dimensional barcode

(PDF417)

Print features: Encrypted PDF 2.0 Direct Print, IPP printing, e-mail printing, WSD print, secure printing via SSL, IPsec, SNMPv3, quick copy, proof and hold, private print, job storage and job management functionality, Super Resolution

Mobile printing support: AirPrint, Mopria, NFC, Direct Wi-Fi (optional), MyPanel and KYOCERA, Mobile Print app for iOS and Android

COPY FUNCTIONS

Max. original size: A3/Ledger Continuous copying: 1 – 9,999

Zoom range: 25 – 400 % in 1% steps

Preset magnification ratios: 5 Reductions/5 Enlargements Exposure mode: Manual: 17 steps

Image adjustments: Text + Photo, Photo, Text, Diagram/Map Features: Scan-once-copy-many, electronic sort, 2in1, 4in1, image repeat, page numbering, cover mode, booklet copy, interrupt copy, form overlay, margin shift, auto cassette change, skip blank page, ID copy, Handwriting erase and highlight

SCAN FUNCTIONS

Functionality: Scan-to-email, Scan-to-FTP, Scan-to-SMB 3.0, Scan-to-USB Host, Scan-to-box, Network TWAIN, WSD scan (WIA Driver Network)

Scan speed: 200 ipm (300 dpi, A4, duplex, with DP-7160/7170)
Scan resolution: 600, 400, 300, 200 dpi, 256 greyscales per colour Max. scan size: A3, Ledger

Original recognition: Text, photo, text + photo, Light Text / Fine Line, optimised for OCR

File types: TIFF, PDF, PDF/A, JPEG, Open XPS, Encrypted PDF, High compression PDF, PDF/A-1a/b, PDF/A-2a/b/u, Searchable PDF (option), MS Office file (option)

FAX FUNCTIONS (OPTIONAL)

Compatibility: ITU-T Super G3

Modem speed: Max. 33.6 kbps

Transmission time: Less than 3 seconds (JBIG) **Scanning speed:** 2.0 seconds or less

Maximum original size: A3/Ledger, Banner: 1600mm

Compression method: JBIG, MMR, MR, MH

Features: Network faxing, rotate transmission, rotate reception, encrypted transmission and reception, duplex

fax reception, memory reception, mailbox, remote diagnostics, polling transmission and reception, broadcast, Optional Internetfax, dual fax with second fax system 12

CONSUMABLES

Average continuous toner yield in accordance with 5% coverage A4.

TK-8375K Toner Kit: Microfine toner black for 30,000 pages A4 TK-8375C, TK-8375M, TK-8375Y Toner Kits: Microfine toner cyan, magenta, yellow for 20,000 pages A4

Staples: SH-10, 5000 x 3 staples, for BF-730, DF-7100, DF-7120 SH-12, 5000 x 3 staples, for DF-7140

WT-8500: Waste Toner Bottle: 40,000 sheets (in accordance with 5% coverage, b/w : colour = 7:3)

OPTIONS

Internet Fax Kit (A) AC

Scan Extension Kit (A) AC: Scan to searchable PDF solution (embedded OCR), convert to PDF or MS Office (docx, xlsx, pptx) DP-7140: (Reversing), 50 sheets, 45–160 g/m2 (simplex), 50–120 g/m2 (duplex), A5R – A3, Banner up to 1,900 mm

DP-7150: (Reversing), 140 sheets, 35–160 g/m² (simplex), 50–120 g/m² (duplex), A6R–A3, Banner up to 1,900 mm

DP-7160: (one-path duplex scanning), 320 sheets at 50 - 80 g/m², 35–220 g/m² (simplex), 50–220 g/m² (duplex), A6R–A3, Banner up to 1.900 mm

DP-7170: (one-path duplex scanning with ultrasonic sensor), 320 sheets at 50 - 80 g/m², 35–220 g/m² (simplex), 50–220 g/m² (duplex), A6R–A3, Banner up to 1,900mm

DT-730(B): Document tray

PF-7120: Side Deck: 3,000 sheets, A4, 60-300 g/m2 **PF-7140:** 2 x 500 sheets, 52–300 g/m2, A6R–SRA3 **PF-7150:** 2 x 1,500 sheets, A4, 52–300 g/m2, A4, B5, Letter

DF-7100: Inner finisher 500 sheets A4, 52–300 g/m2, A6R–SRA3 Stapling up to 50 sheets A4 or 30 sheets A3 at 3 positions

DF-7120: 1,000 sheets A4, 52–300 g/m2, A6R–SRA3, Stapling up to 50 sheets A4 or 30 sheets A3 at 3 positions DF-7140: Main tray: 4,000 sheets A4. Sub tray: 200 sheets A4.

52–300 g/m2, A6R–SRA3, Stapling up to 65 sheets A4 or 30 sheets A3 at 3 positions
AK-7110 attachment kit for DF-7120 and DF-7140:

100 sheets, 52–300 g/m2, A6R–SRA3, Bridge unit AK-7110 is required when using a finish PH-7C/PH-7D: Punch unit for DF-7120 and DF-7140

2-hole/4-hole/Swedish type, 45–300 g/m2, A5R–A3 **MT-730(B):** MT-730(B) Mailbox sorter for DF-7140 7 bins x 100 sheets A4, 50 sheets A3/B4, 60–163 g/m2

BF-730: Booklet and tri-folding unit for DF-7140, Half-folding: 52–256 g/m2, A3, B4, A4R, Booklet: Max. 20 sheets (80 pages 60–90 g/m2), Non-staple folding: Max. 5 sheets (60–90 g/m2) Tri-folding: Tri folding : Max 5 sheets (60–120 g/m2, A4R), Multi tri-folding: 5 sheets (60-90 g/m²), 3 sheets, (91-120 g/m²) **JS-7100**: 100-sheet internal job separator, 52-300 g/m²,

A6R - SRA3

JS-7110: 250-sheet Inner shift tray, 52–300 g/m2, A6R – SRA3 PH-7120: Inner punch unit for inner finisher DF-7100 PH-7130: Inner punch unit for inner finisher DF-7100, Swedish type

HD-15: HDD 320 GB

HD-16: HDD 1 TB NK-7120: NK-7120 Numeric keypad

UG-33 AC: ThinPrint support

UG-34 AC: Emulation (IBM Proprinter/EPSON LQ-850/

USB IC Card Reader + Card Authentication Kit (B) AC

IB-37: Wireless Network Interface (USB: 5GHz/2.4GHz) IB-38: Wireless Network Interface (USB: 2.4GHz)

IB-50: GB-Ethernet board 10 BaseT/100 BaseTX/1,000 BaseT

IB-51: Wireless LAN Interface (802.11b/g/n)

Platen cover Type (E)

CB-7200W: Wooden cabinet CB-7210M: Metal cabinet

The TASKalfa 3554ci incorporates extremely durable components that guarantee efficient and reliable operation, to meet the demanding requirements of busy office environments. The TASKalfa 3554ci provides effective productivity and maximum flexibility, whilst ensuring minimum impact on the environment.







Bloemlaan 4, 2132 NP Hoofddorp, The Netherlands Tel +31 (0) 20-654-0000 - Fax +31 (0) 20-653-1256

KYOCERA Document Solutions Partner

JANUARY2021DSTASKALFA3554CI/VER1.0

KYOCERA Document Solutions Europe B.V.



kyoceradocumentsolutions.eu